NOTICE
The information disclosed herein was originated by and is the property of BIRNS Inc. Except for uses granted by expressly granted, BIRNS Inc reserves all patent, proprietary, design, use, sale, manufacturing and reproduction rights in and to said information and this document.

REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED
	B'	INITIAL DRAWING RELEASE		E.BIRNS

NOTES:
1. APPLY A LIGHT COAT OF ITEM 9 ON O-RINGS PRIOR TO ASSY.
2. CABLE ASSY: CEF3G16
3. OPTIONAL NON-BROWNING SILICA DOME: 35B-011
4. SEE TABLE 1 FOR LAMP OPTIONS.
5. PUT LABEL (WITH SERIAL NUMBER AND MODEL NUMBER) ON HOUSING AFTER ASSEMBLED.
6. PRESSURE RATING: 45 PSIG. MAX. (100°).



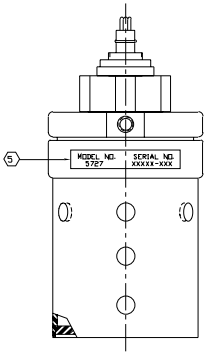

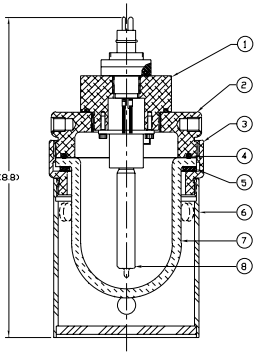

SECTION A-A

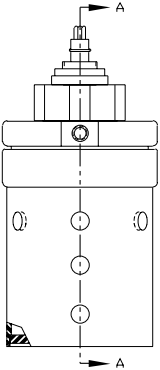

ITEM	QTY	PART NO.	DESCRIPTION	MATERIAL	SPEC
9	AR	52K-005	GREASE	SILICONE	FOOD GRADE
8	1	32B-005	LAMP, 120/500W, MINI-CAN	QUARTZ	COMM'L
7	1	35B-006	DOME, REFUELLING LIGHT	BOROSILICATE	PYREX
6	1	62A-003	LEXAN ASSY, REFUELLING LIGHT	LEXAN	COMM'L
5	1	59B-006	GASKET, REFUELLING LIGHT	SILICONE	5604-70
4	1	59A-016	O-RING, 2-236	SILICONE	5604-70
3	1	56A-036	DOME RETAINING RING, REFUELLING LIGHT	ALUM.	6061-T6
2	1	28B-007	BASE, REFUELLING LIGHT	ALUM.	6061-T6
1	1	56F-005	REAR NUT ASSY, NON-ARMOURED, REFUELLING LIGHT	ALUM.	6061-T6

PARTS LIST

P/N	VOLT/WATT
32B-002	120V/100W
32B-003	120V/150W
32B-004	120V/250W
32B-005	120V/500W
32B-007	120V/1000W
32B-016	240V/100W
32B-015	240V/150W
32B-017	240V/250W

TABLE 1

MATERIAL
TREATMENT
FINISH

NEXT ASSY | USED ON
APPLICATION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
ALL DIMENSIONS TO APPLY AFTER PLATING
.000 ----- +.005
.00 ----- +.010
.0 ----- +.015
FRACTIONS ± 1/32
ANGULAR ± 1/2°
ROUGHNESS 63√
METRIC ± .5
DRILLED HOLES UP TO 1/2" + .005 - .001
BREAK SHARP EDGES .005-.015
FILLET RADII TO BE .015

CONTRACT NUMBER

		DATE
DRAWN	J.KO	960202
CHECK		
ENGR	J.KO	960206
QA	J.MAGLAQUE	960206
APPROVED	E.BIRNS	

BIRNS

TITLE
REFUELLING LIGHT ASSY, ALUM, MINI-CAN, NON-ARMOURED

SIZE D | CAGE CODE 58608 | DWG NO. 57230110
SCALE 1/1 | UNIT W1 | 9 LB | SHEET