PROJECT | CONNECTOR

LOCATION

PIN CONFIGURATION AND WIRING DATA SHEET

3K Receptacle
2-10, 4-22

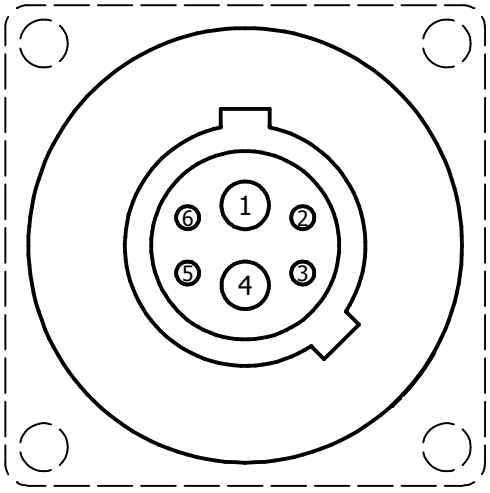

3K-RIP-6



MAXIMUM			
	CURRENT	VOLTAGE	WIRE SIZE
#22	2A	500 V	22 AWG
#10	33A	500 V	10 AWG

FACE VIEW

REAR VIEW
(INSERT)

NO.	DESCRIPTION	WIRE/ FIBER	CURRENT/ FREQUENCY	VOLTAGE/ MODE	NO.	DESCRIPTION	WIRE/ FIBER	CURRENT/ FREQUENCY	VOLTAGE/ MODE
1									
2									
3									
4									
5									
6									

BIRNS, INC. 1720 Fiske Place Oxnard, California 93033-1863
T: (805) 487-5393 F: (805) 487-0427 Toll-Free 1.888.BIRNS.88
NRC 10CFR50, App B Compliant ISO 9001:2008-Certified
www.birns.com